


Httpd Client mode based on TCP Client mode, do HTTP package on the basis of TCP data. For example, after connected, send character string &#8221;index.php?&#8221; Then on the server side, you will receive &#8221;GET /index.php?\\r\\n\\r\\n&#8221;

Example: set module Httpd Client mode, server address www.usr.cn, port 80, and then send &#8221;index.php?&#8221; then you will receive HTTP server web page data, as follows:

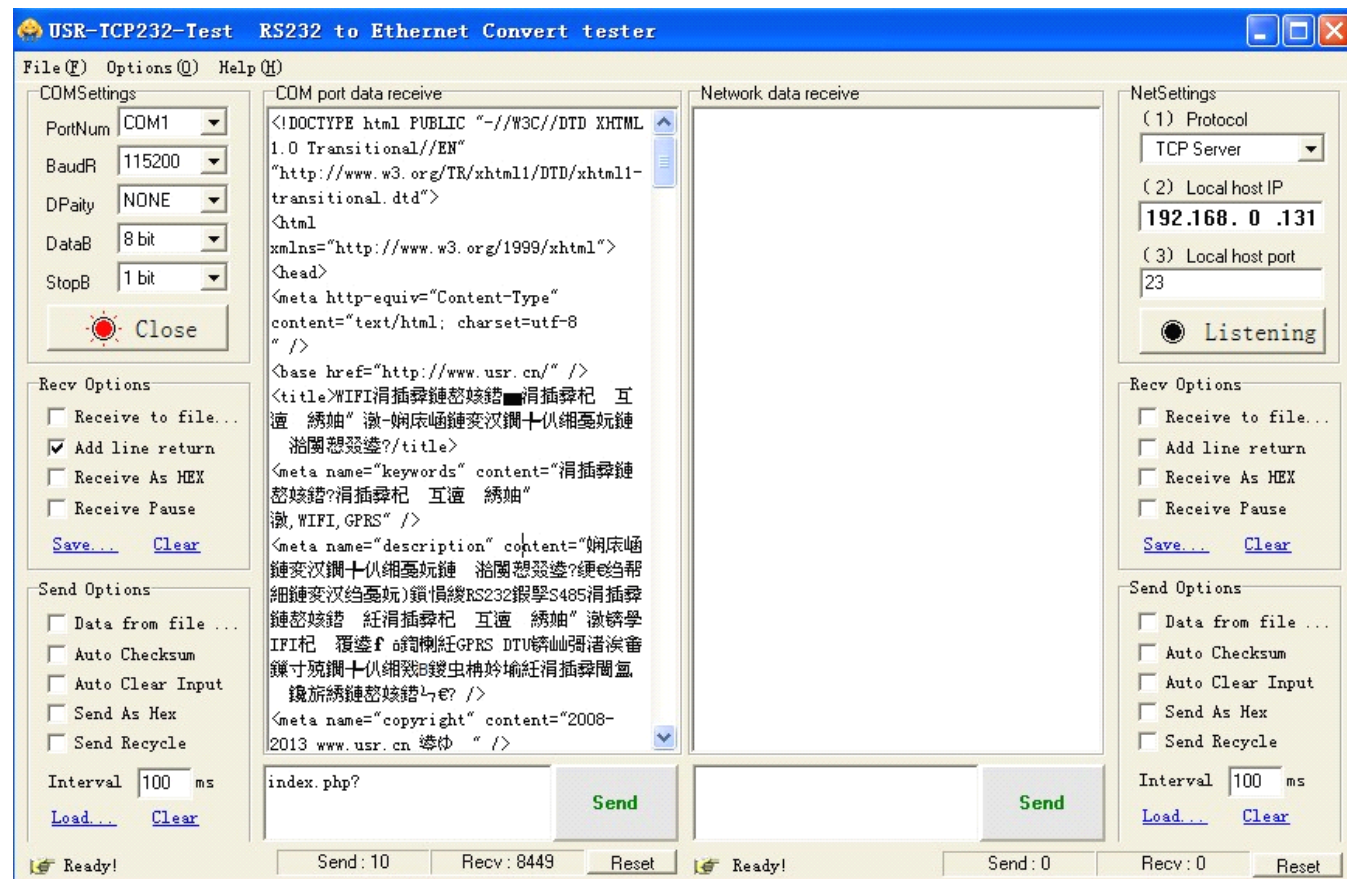

Httpd Client function actually is to do http package on the basis of TCP Client.